

Piede Antivibrante Livellatore

Leveling Antivibrator Foot

Cod.	A	M	B	H	Carico max Statico Max Load daN	U.V.
A4TC60	60	10MA	80	18	200	4
A4TC70	70	12MA	100	20	350	4
A4TC85	85	12MA	100	25	600	4
A4TC100	100	14MA	110	20	800	4
A4TC120	120	16MA	120	25	1100	4
A4TC140	140	16MA	120	33	2000	4
A4TC160	160	16MA	120	31	3000	4

Caratteristiche

Materiale Base: Acciaio zincato

Tipo Base: Antivibrante

Corredo Base: Suola in NR

Durezza: 75 ±5 Shore

Materiale Stelo: Acciaio zincato

Tipo Stelo: Estraibile

Corredo Stelo:

2 dadi ES 24 + 2 rondelle + dado ES 32

Product specification

Base material: Zinc Plated Steel

Base Type: Antivibration

Base Outfit: Base in NR

Hardness: 75 ±5 Shore

Spindle Material: Zinc Plated Steel


Spindle Type: Extractable

Spindle Outfit:

2 ES24 nuts + 2 washers + ES32 nut




A4TC60 - A4TC70 - A4TC85 - A4TC100 - A4TC120

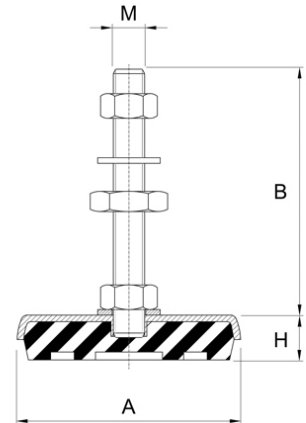

A4TC60 - A4TC70 - A4TC85 - A4TC100 - A4TC120



A4TC140 - A4TC160

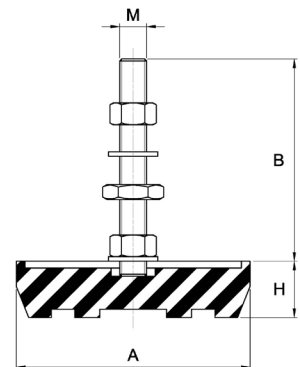

A4TC140 - A4TC160